

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 21 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 1-28-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 3-8-1996
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14022107
N: 486 887.101 8(m)
E: 43 369.545 6(m)

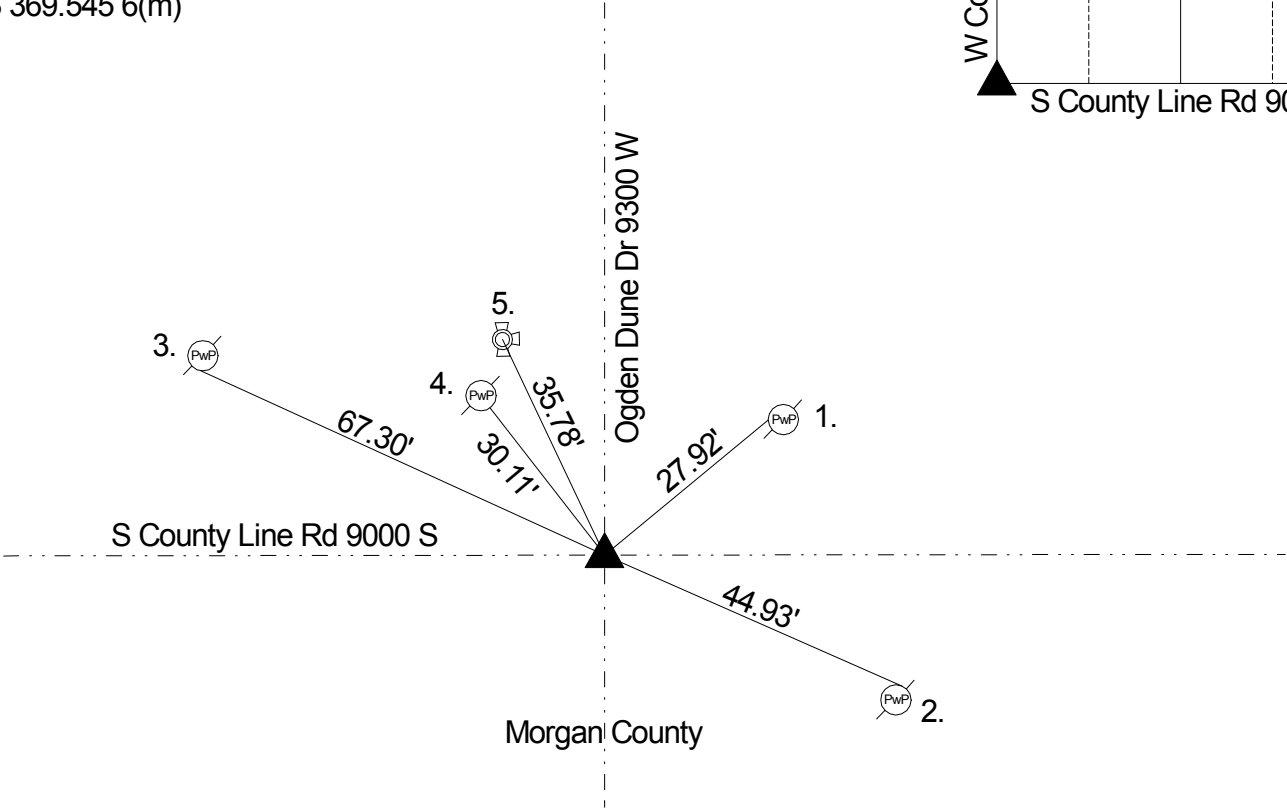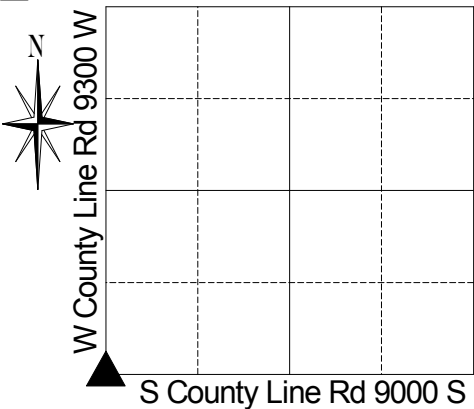

1820 Wm B Laughlin set a post with witnesses: 10" beech N27W 12 links, 50" poplar S33E 23 links, as per pg 1 of the Marion County Atlas. 5-25-1883 DH Fatout surveyed and indicated no monuments or witnesses (Decatur Twp. Legal Survey Book p.30). 7-24-1963 G.W.S. called corner an axle. 8-23-67 J Bookedis called a RR spike over axle. 10-24-74 Hylden called a RR spike. 9-3-85 Green called a RR spike at surface. 7-26-90 Greene excavated corner and found a RR spike at surface, a 24" axle down 10", and set Harrison monument. 5-17-91 Greene called a Harrison. 3-8-96 Wilcoxen called same. 9-28-2000 Kiste called same. 1-28-10 Wilcoxen called same.

REF.	DISTANCE	DESCRIPTION
1.	27.92'	Mag nail w/brass washer W PwP #1-801 W 6" up
2.	44.93'	Mag nail w/brass washer NE PwP #14-M03 E 24" up
3.	67.30'	RR spike S PwP #147-801 BA 6" up
4.	30.11'	Mag nail SE PwP #12-801 BA 15" up
5.	35.78'	Top nut of fire hydrant

--